

University of Nebraska - Lincoln

DigitalCommons@University of Nebraska - Lincoln

---

Nebraska Tractor Tests

Tractor Test and Power Museum, The Lester F.  
Larsen

---

January 2002

## Nebraska Summary 387: John Deere 6420 Autoquad Diesel 24-Speed

Tractor Museum

University of Nebraska-Lincoln, [TractorMuseumArchives@unl.edu](mailto:TractorMuseumArchives@unl.edu)

Follow this and additional works at: <https://digitalcommons.unl.edu/tractormuseumlit>



Part of the [Applied Mechanics Commons](#)

---

Museum, Tractor, "Nebraska Summary 387: John Deere 6420 Autoquad Diesel 24-Speed" (2002).  
*Nebraska Tractor Tests*. 2186.  
<https://digitalcommons.unl.edu/tractormuseumlit/2186>

This Article is brought to you for free and open access by the Tractor Test and Power Museum, The Lester F. Larsen at DigitalCommons@University of Nebraska - Lincoln. It has been accepted for inclusion in Nebraska Tractor Tests by an authorized administrator of DigitalCommons@University of Nebraska - Lincoln.

# SUMMARY OF OECD TEST 2007—NEBRASKA SUMMARY 387

## JOHN DEERE 6420 AUTOQUAD DIESEL

### 24 SPEED

#### POWER TAKE-OFF PERFORMANCE

Power HP (kW)	Crank shaft speed rpm	Gal/hr (l/h)	lb/hp.hr (kg/kW.h)	Hp.hr/gal (kW.h/l)	Mean Atmospheric Conditions
<b>MAXIMUM POWER AND FUEL CONSUMPTION</b>					
<b>Rated Engine Speed (PTO speed-1043 rpm)</b>					
94.3 (70.3)	2302	5.57 (21.09)	0.408 (0.248)	16.92 (3.33)	
<b>Standard Power Take-off Speed (999 rpm)</b>					
96.0 (71.6)	2205	5.54 (20.99)	0.398 (0.242)	17.32 (3.41)	
<b>Maximum Power (2 hours)</b>					
103.9 (77.5)	1801	5.54 (20.99)	0.368 (0.224)	18.74 (3.69)	

#### VARYING POWER AND FUEL CONSUMPTION

94.3 (70.3)	2302	5.57 (21.09)	0.408 (0.248)	16.92 (3.33)	Air temperature
83.9 (62.6)	2411	5.28 (19.98)	0.433 (0.264)	15.90 (3.13)	74°F (23°C)
63.5 (47.4)	2433	4.46 (16.89)	0.485 (0.295)	14.23 (2.80)	Relative humidity
42.8 (31.9)	2457	3.63 (13.74)	0.585 (0.356)	11.78 (2.32)	18%
21.3 (15.9)	2457	2.73 (10.35)	0.884 (0.538)	7.80 (1.54)	Barometer
-- --	2458	1.78 (6.73)	-- --	-- --	29.67" Hg (100.5 kPa)

Maximum Torque - 326 lb.-ft. (442 Nm) at 1503 rpm  
Maximum Torque Rise - 51.4%  
Torque rise at 1800 engine rpm - 41%

#### DRAWBAR PERFORMANCE (Unballasted—Front Drive Engaged) FUEL CONSUMPTION CHARACTERISTICS

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel lb/hp.hr (kg/kW.h)	Consumption Hp.hr/gal (kW.h/l)	Temp. °F (°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
<b>Maximum Power—10th (C2) Gear</b>									
75.4 (56.2)	6380 (28.39)	4.43 (7.13)	2303	7.7	0.515 (0.313)	13.59 (2.68)	131 (55)	54 (12)	29.5 (100.0)
<b>75% of Pull at Maximum Power—10th (C2) Gear</b>									
60.7 (45.3)	4805 (21.37)	4.74 (7.63)	2417	5.8	0.566 (0.344)	12.32 (2.43)	135 (57)	54 (12)	29.5 (100.0)
<b>50% of Pull at Maximum Power—10th (C2) Gear</b>									
42.2 (31.5)	3230 (14.37)	4.90 (7.88)	2445	3.8	0.677 (0.412)	10.34 (2.04)	131 (55)	54 (12)	29.5 (100.0)
<b>75% of Pull at Reduced Engine Speed—11th (C3) Gear</b>									
60.6 (45.2)	4810 (21.39)	4.73 (7.62)	2003	4.7	0.501 (0.305)	13.96 (2.75)	124 (51)	54 (12)	29.5 (100.0)
<b>50% of Pull at Reduced Engine Speed—11th (C3) Gear</b>									
42.2 (31.5)	3210 (14.28)	4.93 (7.93)	2053	3.1	0.578 (0.351)	12.10 (2.38)	128 (53)	54 (12)	29.5 (100.0)

**Location of Test:** DLG Testing Station for Agricultural Machinery Max - Eyth - Weg 1, D-64823 Gros-Umstadt, Germany

**Dates of Test:** January - February, 2002

**Manufacturer:** Deere & Company, Moline, Illinois, USA

**FUEL and OIL:** Fuel No. 2 Diesel **Specific gravity converted to 60°/60° F (15°/15°C)** 0.828 **Fuel weight** 6.89 lbs/gal (0.826 kg/l) **Oil SAE** 15W-40 **API service classification** CF-4 **Transmission and hydraulic lubricant** John Deere Hy-Gard fluid **Front axle lubricant** SAE 80W90.

**ENGINE:** Make John Deere Diesel **Type** four cylinder vertical with turbocharger and intercooler **Serial No.** 661923 **Crankshaft** lengthwise **Rated engine speed** 2300 **Bore and stroke** 4.19" x 5.00" (106.5 mm x 127.0 mm) **Compression ratio** 16.9 to 1 **Displacement** 276 cu in (4525 ml) **Starting system** 12 volt **Lubrication** pressure **Air cleaner** two paper elements **Oil filter** one full flow cartridge **Oil cooler** engine coolant heat exchanger for crankcase oil, radiator for hydraulic and transmission oil **Fuel filter** one paper element **Muffler** underhood **Exhaust** vertical **Cooling medium temperature control** thermostat and variable speed fan

**CHASSIS:** **Type** front wheel assist **Serial No.** 322659 **Tread width** rear 63.1" (1604 mm) to 99.0" (2514 mm) front 59.7" (1516 mm) to 84.1" (2136 mm) **Wheel base** 94.5" (2400 mm) **Hydraulic control system** direct engine drive **Transmission** selective gear fixed ratio with partial (4) range operator controlled powershift **Nominal travel speeds mph (km/h)** first 0.98 (1.58) second 1.18 (1.90) third 1.41 (2.27) fourth 1.73 (2.79) fifth 2.39 (3.85) sixth 2.88 (4.64) seventh 3.44 (5.55) eighth 3.90 (6.28) ninth 4.23 (6.80) tenth 4.70 (7.56) eleventh 5.62 (9.05) twelfth 6.41 (10.31) thirteenth 6.89 (11.09) fourteenth 7.71 (12.41) fifteenth 9.23 (14.86) sixteenth 10.41 (16.75) seventeenth 11.31 (18.20) eighteenth 12.53 (20.16) nineteenth 14.05 (22.61) twentieth 15.01 (24.15) twenty-first 16.91 (27.22) twenty-second 18.38 (29.58) twenty-third 20.26 (32.60) twenty-fourth 24.81 (39.93) reverse 1.03 (1.65), 1.23 (1.98), 1.47 (2.37), 1.81 (2.91), 2.50 (4.02), 3.01 (4.84), 3.60 (5.80), 4.08 (6.56), 4.41 (7.10), 4.90 (7.89), 5.87 (9.45), 6.69 (10.76), 7.20 (11.58), 8.05 (12.95), 9.64 (15.51), 10.86 (17.48), 11.81 (19.00), 13.08 (21.05), 14.66 (23.60), 15.66 (25.20), 17.65 (28.41), 19.18 (30.87), 21.14 (34.02), 25.90 (41.68) **Clutch** multiple wet disc hydraulically operated by foot pedal **Brakes** wet disc hydraulically operated by two foot pedals which can be locked together **Steering** hydrostatic **Power take-off** 540 rpm at 2143 engine rpm or 1000 rpm at 2208 engine rpm. **Unladen tractor mass** 11110 lb (5040 kg)

**DRAWBAR PERFORMANCE**  
**(Unballasted-Front Drive Engaged)**  
**MAXIMUM POWER IN SELECTED GEARS**

Power Hp (kW)	Drawbar pull lbs (kN)	Speed mph (km/h)	Crank- shaft speed rpm	Slip %	Fuel Consumption lb/hp.hr (kg/kW.h)	Temp.°F(°C) cool- ing med	Air dry bulb	Barom. inch Hg (kPa)
77.0 (57.4)	9915 (44.11)	2.91 (4.69)	1839	15.0	9th (B4) Gear 0.503 (0.306)	135 (57)	59 (15)	29.5 (100.0)
79.7 (59.4)	9225 (41.03)	3.24 (5.21)	1800	13.3	10th (C2) Gear 0.478 (0.291)	138 (59)	59 (15)	29.5 (100.0)
81.3 (60.6)	7565 (33.66)	4.03 (6.48)	1798	10.2	11th (C3) Gear 0.468 (0.285)	144 (62)	59 (15)	29.5 (100.0)
81.9 (61.1)	6565 (29.20)	4.68 (7.53)	1796	8.1	12th (D1) Gear 0.462 (0.281)	142 (61)	59 (15)	29.5 (100.0)
82.3 (61.4)	6055 (26.94)	5.10 (8.20)	1799	7.1	13th (C4) Gear 0.460 (0.280)	144 (62)	59 (15)	29.5 (100.0)
84.7 (63.2)	5525 (24.58)	5.75 (9.26)	1794	6.0	14th (D2) Gear 0.449 (0.273)	142 (61)	59 (15)	29.5 (100.0)
83.4 (62.2)	4470 (19.88)	7.00 (11.27)	1800	4.6	15th (D3) Gear 0.456 (0.278)	144 (62)	57 (14)	29.5 (100.0)
81.6 (60.9)	3875 (17.24)	7.90 (12.72)	1795	4.5	16th (E1) Gear 0.465 (0.283)	140 (60)	57 (14)	29.5 (100.0)

**REPAIRS AND ADJUSTMENTS:** No repairs or adjustments

**REMARKS:** All test results were determined from observed data obtained in accordance with official OECD test procedures. This tractor did not meet the manufacturer's claims of 5% improved economy when compared to the John Deere 6410 Diesel, nor 3 point lift capacity of 5915 lb (2683 kg). The performance results on this summary were taken from OECD tests conducted under the Code II Test Code procedure.

We, the undersigned, certify that this is a true summary of data from OECD Report No. **2007**, Nebraska Summary 387, January 23, 2003.

Leonard L. Bashford  
Director

M.F. Kocher  
V.I. Adamchuk  
W.P. Campbell  
Board of Tractor Test Engineers

TRACTOR SOUND LEVEL WITH CAB	Front Wheel Drive	
	Engaged dB(A)	Disengaged dB(A)
At no load in 10th(C2) Gear	71.0	71.0
Maximum Sound level in 10th(C2) gear	73.5	72.5
Bystander	--	--

**TIRES AND WEIGHT**

**Rear Tires**—No., size, ply & psi (kPa)  
**Front Tires**—No., size, ply & psi (kPa)  
**Height of Drawbar**  
**Static Weight with operator**—Rear  
— Front  
— Total

**Tested Without Ballast**

Two 18.4-38; 8; 12 (80)  
Two 16.9-24; 6; 12 (80)  
20.9 in (530 mm)  
7210 lb (3270 kg)  
4065 lb (1845 kg)  
11275 lb (5115 kg)


### THREE POINT HITCH PERFORMANCE (OECD Static Test)

CATEGORY: II

Quick Attach: none

Maximum Force Exerted Through Whole Range: 5825 lbs (25.9 kN)

- i) Opening pressure of relief valve: NA
- Sustained pressure of the open relief valve: 2975 psi (205 bar)
- ii) Pump delivery rate at minimum pressure: 31.1 GPM (117.6 l/min)
- iii) Pump delivery rate at maximum
  - hydraulic power: 27.1 GPM (102.4 l/min)
  - Delivery pressure: 2685 psi (185 bar)
  - Power: 42.4 HP (31.6 kW)

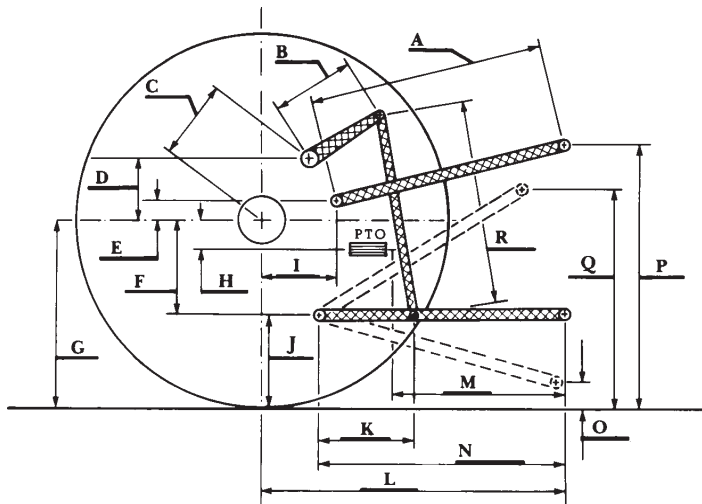

### HITCH DIMENSIONS AS TESTED—NO LOAD

	inch	mm
A	26.0	660
B	12.0	305
C	20.0	508
D	18.7	475
E	7.3	185
F	8.9	225
G	32.3	820
H	2.8	70
I	18.1	460
J	23.4	595
K	19.8	505
L	42.5	1080
M	21.7	550
N	37.2	945
O	7.9	200
P	47.4	1205
Q	33.5	850
R	32.1	815